

HX-TK3001 single-key controller manual

[1. Model] HX-TK3001

[2. Specifications]

2.1 Input: DC12V

2.2 Lamp strip output: less than 5.0A

2.3 Fog Removal Output: Controlled by external relay

2.4 The operating temperature of this product should be below 70°C (working ambient temperature + product temperature rise).

[3. Key Controls].

3.1 Short press to turn on the light, then short press again within 5 seconds to switch color temperature (cool→, warm, →neutral, →and neutral light). After more than 5 seconds, press again to go straight

Turn off the lights and no longer switch color temperatures. When the light is on, press and hold to adjust brightness; after release, press and hold again to reverse the brightness. When the lights are off, press and hold again

Press the button indicator light to turn off, then briefly press again to turn the button indicator light on.

3.2 Switching lights synchronously switch for defogging; after 1 hour of defogging, the lights automatically turn off, but the lights do not turn off automatically.


3.3 When the lights are off, the blue button indicator lights are on; when the lights are on, the white button indicator lights are on.

[4. Notes]

4.1 The on/off status, color temperature, and brightness of the light strip have a power-off memory function that automatically restores power when power is restored the next time


The state two seconds before the power outage.

[5. Wiring diagram].

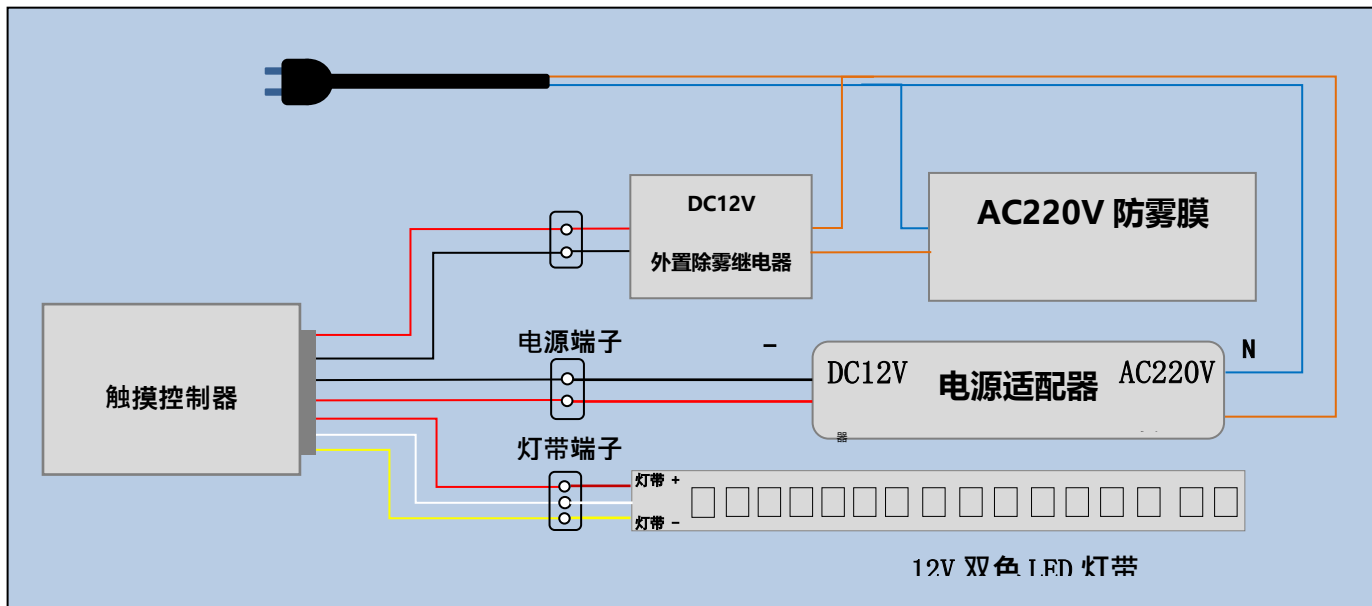

[6. Structural Dimension Diagram]

Unit: mm

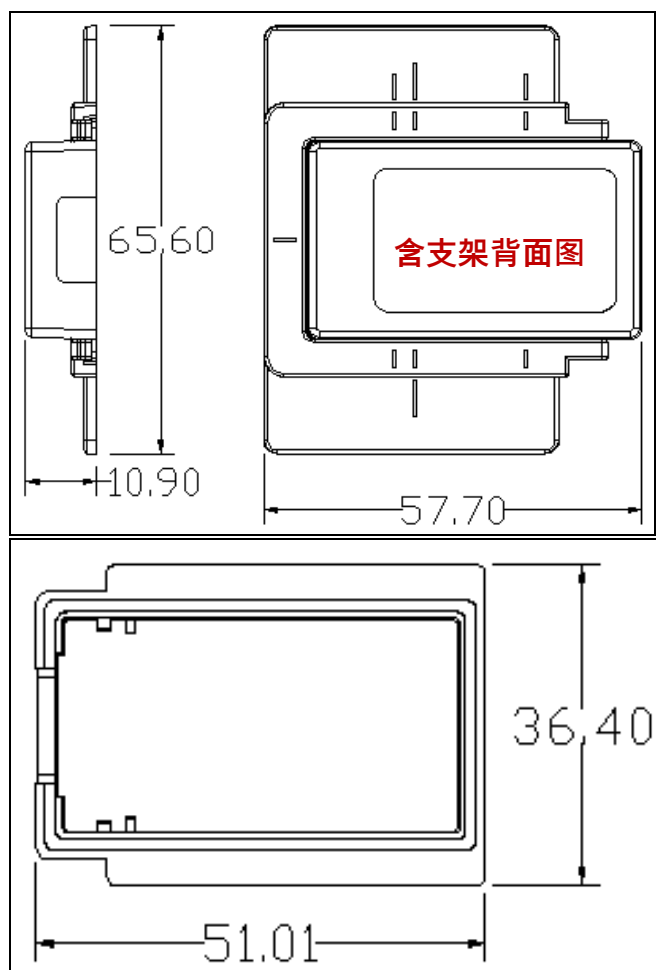

不含支架正面图